



## AISLADORES METÁLICOS\*\*MUELLE SIMPLE\*\*MLC INOX

REF / ART.NR	DIMENSIONES / DIMENSIONS ABMESSUNGEN								COMPRESION / COMPRESSION DRUCKBELASTUNG		CONSTANTE / STIFFNESS RIGIDITE / STEIFIGKEIT	GRÁFICO DE SELECCIÓN	
	ØA	B	C	D	E	F	G	M	CARGA / LOAD CHARGE / LAST	FLECHA / DEFLECTION FLECHE / FEDERWEG			
	mm.								kg.	mm.	kg./cm		
MLC - INOX	MLC25 -INOX	55	79						8	25	24±2,0	10.42	
	MLC50 -INOX	55	79						8	50	24±2,0	20,83	
	MLC75 -INOX	55	79						8	75	24±2,0	31,25	
	MLC100-INOX	55	79						8	100	24±2,0	41.67	
	MLC125-INOX	55	79						8	125	24±2,0	52,08	
	MLC150-INOX	73	115						12	150	30±3,0	50.00	
	MLC200-INOX	73	115						12	200	30±3,0	66.67	
	MLC250-INOX	73	115						12	250	30±3,0	83,33	
	MLC300-INOX	73	115						12	300	30±3,0	100.00	
	MLC350-INOX	73	115						12	350	30±3,0	116.67	
MLC - B - INOX	MLC25B -INOX	55	83	91	55	70	10	10	8	25	24±2,0	10.42	
	MLC50B -INOX	55	83	91	55	70	10	10	8	50	24±2,0	20,83	
	MLC75B -INOX	55	83	91	55	70	10	10	8	75	24±2,0	31,25	
	MLC100B-INOX	55	83	91	55	70	10	10	8	100	24±2,0	41.67	
	MLC125B-INOX	55	83	91	55	70	10	10	8	125	24±2,0	52,08	
	MLC150B-INOX	73	116.5	110	75	91	13.8	10	12	150	30±3,0	50,00	
	MLC200B-INOX	73	116.5	110	75	91	13.8	10	12	200	30±3,0	66.67	
	MLC250B-INOX	73	116.5	110	75	91	13.8	10	12	250	30±3,0	83,33	
	MLC300B-INOX	73	116.5	110	75	91	13.8	10	12	300	30±3,0	100.00	
	MLC350B-INOX	73	116.5	110	75	91	13.8	10	12	350	30±3,0	116.67	
MLC - BB - INOX	MLC25BB -INOX		87	91	55	70	10	10		25	24±2,0	10.42	
	MLC50BB -INOX		87	91	55	70	10	10		50	24±2,0	20,83	
	MLC75BB -INOX		87	91	55	70	10	10		75	24±2,0	31,25	
	MLC100BB-INOX		87	91	55	70	10	10		100	24±2,0	41.67	
	MLC125BB-INOX		87	91	55	70	10	10		125	24±2,0	52,08	
	MLC150BB-INOX		118	110	75	91	13.8	10		150	30±3,0	50.00	
	MLC200BB-INOX		118	110	75	91	13.8	10		200	30±3,0	66.67	
	MLC250BB-INOX		118	110	75	91	13.8	10		250	30±3,0	83,33	
	MLC300BB-INOX		118	110	75	91	13.8	10		300	30±3,0	100.00	
	MLC350BB-INOX		118	110	75	91	13.8	10		350	30±3,0	116.67	


MLC-INOX

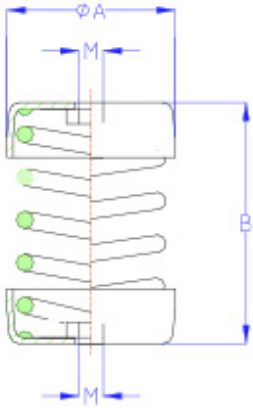


MLC-B 25-50-75-100-125

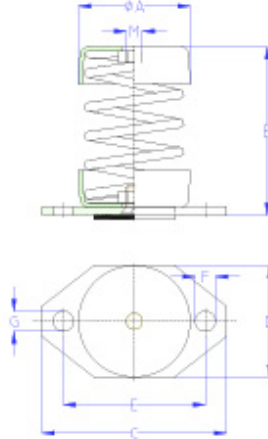

MLC-BB 25-50-75-100-125

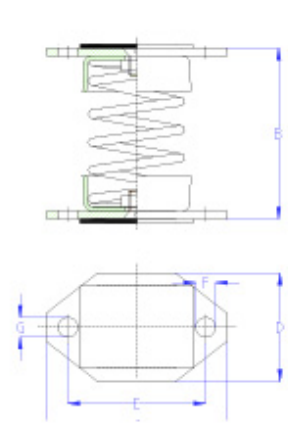

MLC-B 150-200-250-300-350

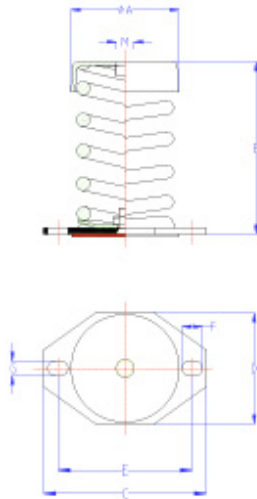

MLC-BB 150-200-250-300-350

