

THERMAL TRANSFER OVERPRINTERS SVM 107-75 I SVM 107-125 I SVM 107 C



SPECIFICATIONS

High performance, low cost thermal transfer printers are versatile enough for printing fixed and variable text, data and graphics. It is ideal for reproducing barcodes, real time, sell-by dates, batch numbers, prices, source codes and much more. Brackets can be easily integrated to the machines such as vertical and horizontal form-fill-seal systems, primary labellers, thermo formers and overwrapping equipments. The units are suitable for all intermittent and continuous applications within the food, pharmaceutical cosmetics and automobile spare parts industries has the capability to code all kinds of 1D barcodes and 2D datamatrix codes.

KEY FEATURES

- Patented long life mechanical design needs no maintenance
- 107mm x 75mm and 107mm x 125mm print area for intermittent and 107x125mm for continuous
 - 600m ribbon capacity
- Print Quality 300dpi (12 dot / inch).
- The USB can be used to: - Move messages and configurations between printers for local based set-up
 - Back-up and restore messages and printer settings
- Large memory for all label formats to be stored locally.

Savema

Marking and Coding Machines

www.savema.com.tr





SVM 107-75 I // SVM 107-125 I // SVM 107 C

Specifications

	107-75 I	107 C
Print Area	Width 107mm	Width 107mm
	Length 75mm	Length 125mm
Resolution	Width 107mm	} Optional
	Length 125mm	
Print Speed	12 dots/mm (300dpi)	
Production	horizontally and vertically	
Thermal Ribbon	Up to 400mm / second	600mm / second
Memory	200 prints/min (in one line)	250 prints/min
Power Supply	600 meter (656 yds.) loaded ribbon	
Air Supply	5000 text memory	
Wight (printer)	USB standart	
Dimensions	110/220/240 V 50/60 Hz	
Outputs	min. 1 bar - max. 4 bar	
Ribbon Widths	11,6 kg	
Operating Temperature	180mm H x 220mm W x 303mm D	
Control Panel	Machine on error (failsafe) - image ready, power on, print per minute etc	
	55 mm. 110 mm. (2,2" - 4,28")	
	5°- 50°C (41° -104°F)	
	7" Touch Screen Panel	

Programming

Fields	Real DATE/Time. Text, Barcode, 2D Barcodes, Logo, Counter (Serial No), Shift Code, Shape, Currency
Barcodes	1 D Barcodes, 2 D Barcodes, Datamatrix EAN- 8,EAN-13,EAN-128, CODE 128, CODE 39, 1-2 of 5, CODE 93, CODE BAR DUN 14, ISBN, UPC-A, UPC-E 2D Datamatrix, QR Code, AZTEC Code, PDF417
Communications	RS-232 (PC), LAN, USB
Pc Programmes	Multi-language (14) support standard SAYASIS Label Program

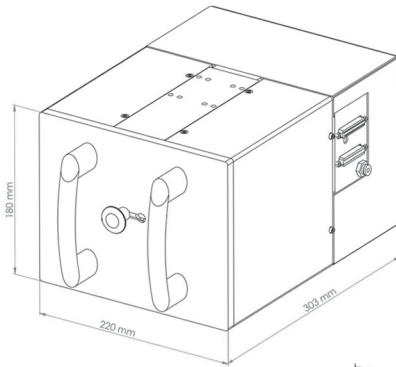

continuous



Intermittent